# **COMBi-SL C9,000SL-C12,000SL**



The 3 wheel sideloader forklift designed for the safe, space saving and productive handling of long and bulky loads.














## **COMBi-SL C9,000SL-C12,000SL**

SiDE VIEW



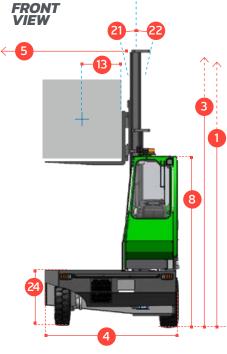



**OVERHEAD** 

REF.	DESCRIPTION	C9000 SL	C10,000 SL	C12,000 SL
1a	Standard Lift Height		159"	
1b	Free Lift Height		0"	
2	Height Mast Closed		118"	
3	Max. (Mast raised)		2043/4"	
4	Overall Length	803/4"	803/4"	881/2"
5	Mast Travel	51"	51"	59"
6	Ground Clearance Under Mast		12"	
7	Ground Clearance to Center of Wheelbase		13"	
8	Height Over Cab (Without work lights)		105"	
9	Width		1531/2"	
10	Outside Spread of Fork Arms		53"	
11	Track Front		1281/4"	
12	Frame Opening		55"	
13	Load Center Distance		231/2"	
14	Overhang Front		121/2"	
15	Wheelbase		1281/4"	
16	Overhang Back		121/2"	
17	Length From Face of Fork		331/2"	
18	Approach Angle		45°	
19	Ramp Angle		18°	
20	Departure Angle		45°	
21	Forward Tilt		3°	
22	Backward Tilt		5°	
23	Minimum Outisde Radius		102"	
24	Platform Height (Optional 750mm)		331/2"	
25	Platform Length	47"	47"	55"
Α	Capacity	9000 lbs	10,000 lbs	12,000 lbs

Α	Capacity	9000 lbs	10,000 lbs	12,000 lbs	
В	Unladen Weight	21,650 lbs	21,825 lbs	22,490 lbs	
C	Maximum Ground Speed	12 mph			
D	Gradeability	15%			
Е	Deutz TCD 3.6 ltr / LPG GM (PSI) Engine - 4.3L	74 HP / 96 HP			
F	Electrics	12 Volt			
G	Fork Section 2" x 8" x	47"	47"	55"	
Н	27 x 10 - 12 Front Tire	OD 27" / Width 10"			
- 1	355 / 65 - 15 Rear Tire	OD 31" / Width 111/2"			
J	Standard Color	Green & Gray			
K	Suspension Seat	KAB Model 116			

### **Multi-Directional**



#### Features Include:

- Rubber Mounted Cabin
- Multi-Directional Operation
- AC Motor Technology
- 4-way lever positioning of Wheels
- 2 Wheel Drive

### **Distributed by:**



COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.