



AUTOMATIC SCRUBBERS - WALK BEHIND



## CT30

The CT30 is a compact machine with high productivity. With its 18 in cleaning path, it can clean up to 15,000 square feet an hour and still have the ability to reach into tight, congested spaces.

### MAX PRODUCTIVITY

15,000 ft<sup>2</sup>/h

### BATTERIES RUNNING TIME

2.0 h

### KEY SPECS

8/9 gal

18" brush drive

### MOST FREQUENT USE

#### RETAIL



#### HOSPITALITY



#### CLEANING CONTRACTORS



#### EDUCATION



FOLDABLE HANDLE



SPIN-ON, SPIN-OFF BRUSH



EASY TO USE CONTROLS



### INNOVATIONS



ECO  
SELECT



SLS™  
SELF  
LEVELING  
SYSTEM




## ECO SELECT

Eco Select permits to decrease energy consumption and increase running time by 20% in every day cleaning operations. Noise level is down to 62Db allowing cleaning operations even in sensitive areas. Programmed maintenance is longer with consequent cost reduction.



Maintenance  
Costs

SAVE UP TO  
**20%**

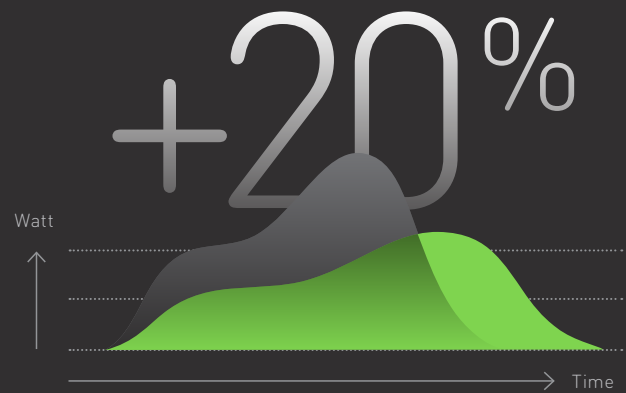

## SLS™ SELF LEVELING SYSTEM

### MECHANICAL SYSTEM



- The brush pressure with self-leveling and self-adjusting head allows a perfect fit between the brush and floor
- System available as mechanical, electro mechanical or electronic according to machine models



## FOLDABLE HANDLE

The adjustable multi-position handle on CT30 allows many applications with maximum comfort to the operator, even in narrow areas.



Handle  
Adjustment  
Angle

**180°**



## CT30

ADJUSTABLE HANDLE

.01

.02

REMOVABLE TANK

High density polyethylene tanks.

Metal chassis with anti-corrosion treatment.

.03

MOTORS

Brush motor with oil bath reduction gear box.

Three-stage suction motor.

.04

BATTERIES AND CHARGERS



### Other Features

- Brush replacement without tools
- Squeegee blades can be used on four sides before needing replacements
- Easy access to internal compartments
- Tanks and surrounding body in high density polyethylene
- Oil bath reduction gear box
- Brush head and squeegee system designed to absorb harsh impact
- Panel control switches protected against water and humidity
- Central Flow System
- Great maneuverability due to optimum weight distribution

## CT30 TECHNICAL SPECIFICATIONS

### CT30 BATTERY BRUSH DRIVE

Code		CT30B
PRODUCTIVITY		
Max theoretical productivity	ft²/h - m²	15,000/ 1,670 m²
Squeegee width	in/mm	22 in/ 450 mm
Cleaning path	in/mm	18 in/ 450 mm
Water tank capacity	Gal/ l	8/9 gal/ 28/30 l
Max running time	min	120
Voltage	V-Ah	24V (2x12) AGM
Installed power	W	550
Max Speed		2.2 mph/ 3.5 kph
Brush pressure	lbs/ kg	46 lbs/ 21 kg
Weight	lbs/ kg	205 lbs/ 93 kg
Dimensions	in	38 x 22 x 48 in

## AVAILABLE ACCESSORIES

**PAD DRIVER**  
SPPV01306



**SOFT NYLON BRUSH**  
SPPV01188



**TYNEX BRUSH**  
SPPV01487



**SOFT NATURAL BRISTLE BRUSH**  
SPPV01490



**12 V 84 AGM**  
12V84-AGM



**SQUEEGEES**  
PMVR01986 (COMPLETE)  
MPVR05953 (FRONT)  
MPVR05954 (REAR)



## GET RIGHT SIZED

	Description	Continuous run-time	Theoretical ft <sup>2</sup> / h	Maximum Theoretical ft <sup>2</sup> /charge	Ft <sup>2</sup> charge efficiency (70%)
CT30B45	Brush drive, 12v84 AGM Battery	2.0 h	15,130	30,260	21,182

**(844) 432-4724**  
**fairchildequipment.com**



**IPC Eagle Corporation**  
12450 Oliver Ave S Burnsville, MN 55337

800-486-2775  
info@ipceagle.com