

MS 260

MODELS

24V | 36V | 48V



THE GAME-CHANGING STOCK CHASER.

This stand-up stock chaser / order picker is famous for its versatility. That's because the MS 260 does everything a workday could ask for. It can easily tow up to 6,000 lbs. and carry up to 1,750 lbs. It also comes equipped with all the features operators need to make their job easier: 59" deck, dual front wheels, short turning radius, light touch controls, padded backrest, ergonomic driving position and low-step entry. Also standard? Leaf spring suspension, integrated 2-step ladder, loading anchors, USB charger, storage compartments and fully protected electrical components. And because it's a Motrec, it's also fully customizable.

FEATURES

- 1 Stability-boosting dual front wheels
- 2 Energy-saving regenerative braking
- 3 Built-to-last all-steel unibody construction
- 4 Recessed dual headlights
- 5 USB and 12V aux chargers, backlit and sealed buttons
- 6 2-step ladder on backrest
- 7 EE rating available



MODELS	LOAD CAPACITY (lbs.)	TOWING CAPACITY (lbs.)	PASSENGERS	SPEED (mph)	TURNING RADIUS (in)
24V	1,250	2,500	1	8	60
36V	1,500	6,000	1	8	60
48V	1,750	6,000	1	8	60














CONTACT US 1 866 846-3558

MOTREC.COM

SPECIFICATIONS

MS 260

PERFORMANCE		24V	36V	48V
	LOAD CAPACITY	1,250 lbs – 567 kg	1,500 lbs – 680 kg	1,750 lbs – 794 kg
	TOWING CAPACITY	2,500 lbs – 1,134 kg	6,000 lbs – 2,722 kg	6,000 lbs – 2,722 kg
	SPEED	8 mph – 13 km/h	8 mph – 13 km/h	8 mph – 13 km/h
	TURNING RADIUS	60" – 1,524 mm	60" – 1,524 mm	60" – 1,524 mm
	PASSENGERS	1	1	1
POWERTRAIN				
MOTOR	Shunt motor	6 HP	10 HP	
	Brushless AC motor			15 HP
CONTROLLER	SEPEX Electronic speed controller	✓	✓	
	Electronic AC speed controller			✓
DRIVE AXLE	Helical gear differential	✓	✓	✓
BRAKES	Self-adjusting H.D. drum brakes, automatic parking brake, regenerative braking	✓	✓	✓
WHEELS	Pneumatic LRC tires	✓	✓	✓
TRANSMISSION	Direct drive	✓	✓	✓
SUSPENSION	Leaf springs rear suspension system	✓	✓	✓
CHASSIS				
BODY	All-steel unibody construction. Powder Coating.	✓	✓	✓
COLOR	Security orange or federal yellow (optional colors available)			
LIGHTS	LED dual headlights	✓	✓	✓
OPERATOR COMPARTMENT				
STEERING	Automotive steering wheel	✓	✓	✓
SEATS	Padded backrest	✓	✓	✓
	Battery status indicator	✓	✓	
INDICATORS	Multifunction display including speedometer, battery state of charge, hour meter, odometer and fault warnings. Password-protected parameters and monitoring capability			✓
SAFETY	Reverse alarm, deadman foot switch, horn, emergency stop button, jam-free pedal, anti slip griptape, charging interlock switch	✓	✓	✓
	USB charger, backlit and sealed buttons	✓		
ACCESSORIES	USB charger, DC/DC converter for 12-volt accessories, backlit and sealed buttons		✓	✓

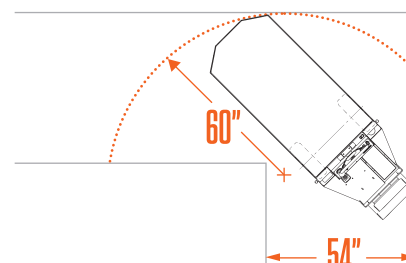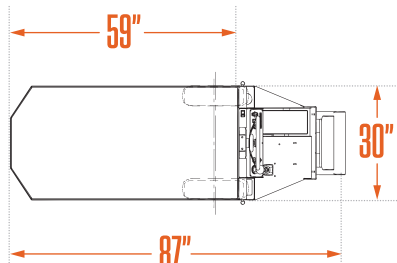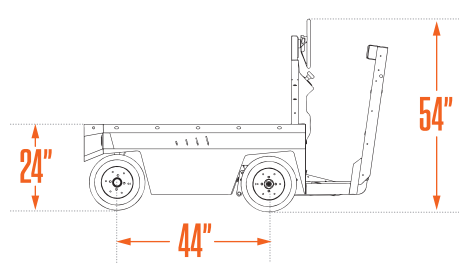

UNBEATABLE VEHICLES BACKED BY UNBEATABLE WARRANTIES

3-Year limited warranty on all Motrec vehicles with AC technology, our MS-260 stock chaser and all Motrec trailers.



1 866 846-3558
MOTREC.COM

POPULAR OPTIONS

READY FOR EVEN MORE

MS 260

MODELS
24V | 36V | 48V



For compatibility, please contact your Motrec dealer. Options may vary from illustrations provided.

- 4 **LIGHTS**
Maximize vehicle visibility & everyone's safety with a blue safety light, strobe light, tail and brake lights and more.
- 5 **HITCHES & QUICK HITCH RELEASE**
A must-have for attaching a trailer to boost cargo capacity. A wide range of hitches & hitch accessories to make attaching loads quick, easy & worry free.
- 6 **WHEELS**
Motrec offers a wide range of wheels to handle your specific use: non-marking solid tire wheel, rubber solid tire wheel, pneumatic on rim, traction tire, and more.



PERFORMANCE

- TOWING CAPACITY** up to 6,000 lbs.
- LOAD CAPACITY** up to 1,750 lbs.
- DECK SIZE** 59" x 30"
- SPEED** 8 mph
- TURNING RADIUS** 60"

RECOMMENDED INDUSTRIES



Courier
services



Warehousing,
logistics
and distribution



Greenhouses,
agriculture &
plan nursery



1 866 846-3558
MOTREC.COM